


Countersunk / Smooth / Metric

Low profile head. Optimal for low load bearing applications in thin sheet.

Material: Low carbon steel to BS 970 040A04 SAE 1008

Finish: Zinc Clear Cr3

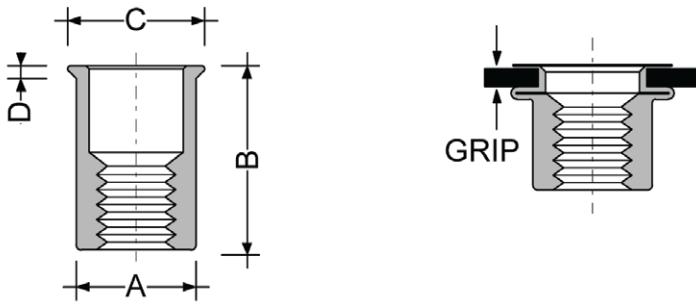

Thread Size	SKU	Grip Range mm	Hole Size mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Torque-To-Turn* Nm
M3	43C3SM	0.5-1.5	4.8	4.8	9.0	5.3	0.4	2.7	0.8	1.6
M4	43C4SM	0.5-2.0	6.4	6.3	10.4	7.1	0.45	6.1	1.5	5.2
M5	43C5SM	0.5-3.0	7.2	7.1	12.0	8.1	0.5	8.0	1.9	7.8
M6	43C6SM	0.8-3.0	9.6	9.5	15.0	10.5	0.6	11.4	2.5	12.7
M8	43C8SM	0.9-3.0	10.6	10.5	16.0	11.5	0.6	15.8	2.8	16.7
M10	43C10SM	1.0-4.0	12.7	12.7	19.0	13.9	0.7	19.1	3.7	34.3
M12	43C12SM	1.0-3.5	15.0	14.9	21.0	17.0	0.7	–	–	–

Torque-To-Turn *

Minimum torque applied to cause the fastener to turn in the parent material.

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.

The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.

We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.

