


Large Flange / Brass body / Thermoplastic

Rubber Nuts are optimal for applications where isolation to vibration and noise transmission is desirable. Installed from one side, without special tools. Absorbs vibration due to high elasticity. Suitable for thin as well as thick plates, pipes, glass and plywood. Watertight seal. No electrical conductivity. Can be removed.



Material: Rubber/Brass Nut

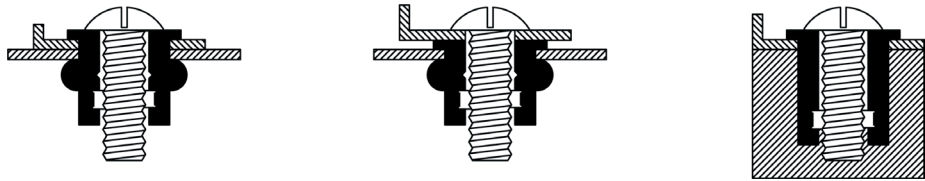

Thread Size	SKU	Grip Range mm	Hole Size mm	Flange (diameter) mm	Flange (height) mm	Length (overall) mm	Torque Nm	Hardness Durometer
M4	43RN41260	0.4-4.0	8.0	11.0	1.40	12.60	0.25-0.4	70
	43RN4124	8.5-15.0	8.0	11.0	1.20	24.00	0.25-0.4	70
M5	43RN51410	0.4-4.9	9.7	12.7	0.90	14.10	0.34-0.5	60
	43RN52650	7.9-16.0	9.7	14.0	1.30	26.50	0.3-0.7	60
M6	43RN616*	0.4-2.8	12.8	16.0	1.30	16.00	0.6-1.0	60
	43RN62110	0.8-4.7	12.8	19.0	4.75	21.10	0.8-1.0	70
	43RN6270	6.4-11.5	12.8	16.3	2.00	26.70	0.8-1.0	70
	43RN635	11.5-23.0	13.1	16.0	1.30	35.00	0.8-1.0	60
M8	43RN81830	0.4-4.0	16.0	21.5	3.20	18.30	1.0-1.5	60
	43RN830	2.0-18.0	18.1	20.5	2.00	30.00	1.0-1.6	60
	43RN850	15.0-39.0	18.1	20.0	1.60	50.00	3.0-4.0	60
M10	43RN1055	19.0-40.0	20.1	22.5	1.30	55.00	4.4-5.4	60

Check for availability *

Body material is susceptible to damage from oil and solvents.
 Temperature range applicable -30 thru +80 celcius.
 Hardness (+/-5) Shore - 60

Dimensions and specifications are subject to change without notice.
 The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.
 We recommend testing your application when an exact strength figure is required or the load to be applied comes close to the published data.

