

Disclaimer: Images are for illustrative purposes.

Bremick MultiONE®

Head Style: Contour Head

Drive Type: Torx

Screw Point: Multi Purpose High Tech Drill Tip


Material: Hardened Steel

Class Grade: B8® Cat 5

Finish: Revolution B8® Coating

Corrosion Protection Level: Ultimate

Internal External: External

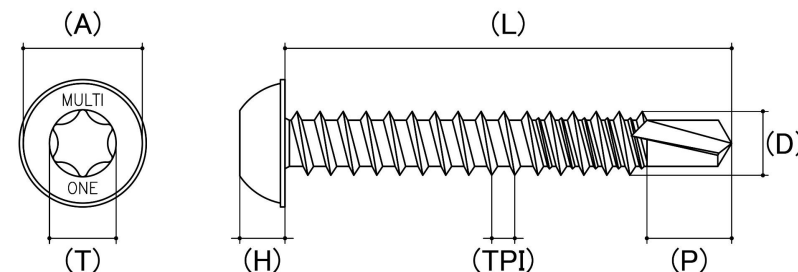

| Size | Length (mm) | Product Diameter (D) (mm) | | Head Diameter (A) (mm) | Head Height (H) (mm) | Drill Point Length (P) (mm) | Single Shear (kN) | Axial Tensile (kN) | Torsional (Nm) | Driver Bit Size (AS) | Driver Bit Included | sku (Part Number) |
|--------------|-------------|---------------------------|------|------------------------|----------------------|-----------------------------|-------------------|--------------------|----------------|----------------------|---------------------|-------------------|
| | Nom | Min | Max | Nom | Nom | Nom | Nom | Nom | Nom | | | |
| 8g (4.20mm) | 25.00 | 4.00 | 4.20 | 9.60 | 3.20 | 4.70 | 5.800 | 6.200 | 5.900 | T25 | Yes | 05MCT825 |
| 8g (4.20mm) | 30.00 | 4.00 | 4.20 | 9.60 | 3.20 | 4.70 | 5.800 | 6.200 | 5.900 | T25 | Yes | 05MCT830 |
| 8g (4.20mm) | 40.00 | 4.00 | 4.20 | 9.60 | 3.20 | 4.70 | 5.800 | 6.200 | 5.900 | T25 | Yes | 05MCT840 |
| 10g (4.80mm) | 30.00 | 4.65 | 4.80 | 10.90 | 4.00 | 4.70 | 8.300 | 10.600 | 11.400 | T25 | Yes | 05MCT1030 |
| 10g (4.80mm) | 40.00 | 4.65 | 4.80 | 10.90 | 4.00 | 4.70 | 8.300 | 10.600 | 11.400 | T25 | Yes | 05MCT1040 |
| 10g (4.80mm) | 50.00 | 4.65 | 4.80 | 10.90 | 4.00 | 4.70 | 8.300 | 10.600 | 11.400 | T25 | Yes | 05MCT1050 |
| 10g (4.80mm) | 65.00 | 4.65 | 4.80 | 10.90 | 4.00 | 4.70 | 8.300 | 10.600 | 11.400 | T25 | Yes | 05MCT1065 |
| 12g (5.50mm) | 60.00 | 5.30 | 5.40 | 14.15 | 4.50 | 4.70 | 9.600 | 14.000 | 13.500 | T30 | Yes | 05MCT1260 |
| 12g (5.50mm) | 75.00 | 5.30 | 5.40 | 14.15 | 4.50 | 4.70 | 9.600 | 14.000 | 13.500 | T30 | Yes | 05MCT1275 |

| Size | Length (mm) | Product Diameter (D) (mm) | | Head Diameter (A) (mm) | Head Height (H) (mm) | Drill Point Length (P) (mm) | Single Shear (kN) | Axial Tensile (kN) | Torsional (Nm) | Driver Bit Size (AS) | Driver Bit Included | sku (Part Number) |
|--------------|-------------|---------------------------|------|------------------------|----------------------|-----------------------------|-------------------|--------------------|----------------|----------------------|---------------------|-------------------|
| | Nom | Min | Max | Nom | Nom | Nom | Nom | Nom | Nom | | | |
| 12g (5.50mm) | 100.00 | 5.30 | 5.40 | 14.15 | 4.50 | 4.70 | 9.600 | 14.000 | 13.500 | T30 | Yes | 05MCT12100 |
| 14g (6.30mm) | 65.00 | 6.20 | 6.40 | 14.15 | 4.70 | 5.30 | 11.100 | 20.300 | 20.800 | T30 | Yes | 05MCT1465 |
| 14g (6.30mm) | 75.00 | 6.20 | 6.40 | 14.15 | 4.70 | 5.30 | 11.100 | 20.300 | 20.800 | T30 | Yes | 05MCT1475 |
| 14g (6.30mm) | 100.00 | 6.20 | 6.40 | 14.15 | 4.70 | 5.30 | 11.100 | 20.300 | 20.800 | T30 | Yes | 05MCT14100 |

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026