

Disclaimer: Images are for illustrative purposes.

Pop Blind Rivet

Head Style: Countersunk Head


Shell Material: Stainless G304

Stem Material: Stainless G304

Corrosion Protection Level: Excellent

Standard: DIN7337

Comments: When selecting the right rivet, start with hole size and grip range.

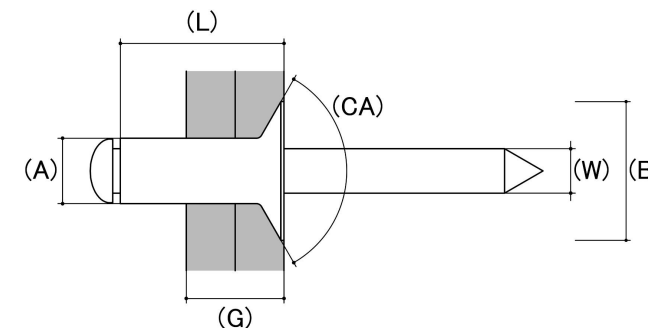

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)		Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	CSK Angle (CA)	Tensile	Shear	sku (Part Number)
		Min	Max	Nom	Min	Max	Min	Max		Nom	Nom	Nom	
72 STST 4-2	3.20 (1/8)	5.10	6.00	6.20	2.30	3.20	1.70	2.00	3.30	120°	2358	1868	72STST42
72 STST 4-3	3.20 (1/8)	5.10	6.00	7.80	3.20	4.80	1.70	2.00	3.30	120°	2358	1868	72STST43
72 STST 4-4	3.20 (1/8)	5.10	6.00	9.40	4.80	6.40	1.70	2.00	3.30	120°	2358	1868	72STST44
72 STST 4-6	3.20 (1/8)	5.10	6.00	12.50	7.90	9.50	1.70	2.00	3.30	120°	2358	1868	72STST46
72 STST 5-1	4.00 (5/32)	6.80	7.50	5.85	0.80	1.60	2.10	2.50	4.10	120°	2358	1868	72STST51
72 STST 5-2	4.00 (5/32)	6.80	7.50	7.00	2.30	3.20	2.10	2.50	4.10	120°	2358	1868	72STST52
72 STST 5-3	4.00 (5/32)	6.80	7.50	8.40	3.20	4.80	2.10	2.50	4.10	120°	2358	1868	72STST53
72 STST 5-4	4.00 (5/32)	6.80	7.50	10.00	4.80	6.40	2.10	2.50	4.10	120°	2358	1868	72STST54
72 STST 5-6	4.00 (5/32)	6.80	7.50	13.00	7.90	9.50	2.10	2.50	4.10	120°	2358	1868	72STST56
72 STST 6-2	4.80 (3/16)	8.60	9.50	8.20	2.30	3.20	2.50	2.90	4.90	120°	2358	1868	72STST62
72 STST 6-3	4.80 (3/16)	8.60	9.50	10.10	3.20	4.80	2.50	2.90	4.90	120°	2358	1868	72STST63
72 STST 6-4	4.80 (3/16)	8.60	9.50	10.50	4.80	6.40	2.50	2.90	4.90	120°	2358	1868	72STST64
72 STST 6-6	4.80 (3/16)	8.60	9.50	13.80	7.90	9.50	2.50	2.90	4.90	120°	2358	1868	72STST66
72 STST 6-8	4.80 (3/16)	8.60	9.50	17.50	9.60	12.70	2.50	2.90	4.90	120°	2358	1868	72STST68
72 STST 6-10	4.80 (3/16)	8.60	9.50	20.50	12.70	15.90	2.50	2.90	4.90	120°	2358	1868	72STST610

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)		Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	CSK Angle (CA)	Tensile	Shear	sku (Part Number)
		Min	Max	Nom	Min	Max	Min	Max		Nom	Nom	Nom	
72 STST 8-8	6.40 (1/4)	11.80	12.70	18.50	9.60	12.70	3.65	3.90	6.50	120°	2358	1868	72STST88
72 STST 8-10	6.40 (1/4)	11.80	12.70	21.90	12.70	15.90	3.65	3.90	6.50	120°	2358	1868	72STST810
72 STST 8-12	6.40 (1/4)	11.80	12.70	23.50	15.90	19.10	3.65	3.90	6.50	120°	2358	1868	72STST812

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026