

Disclaimer: Images are for illustrative purposes.

Self Tapping Screw

Head Style: Countersunk Head

Drive Type: Phillips


Class Grade: Hardened Steel

Finish: Black Zinc

Material: Hardened Steel

Corrosion Protection Level: Moderate

Standard: AB ANSI B18.6.4

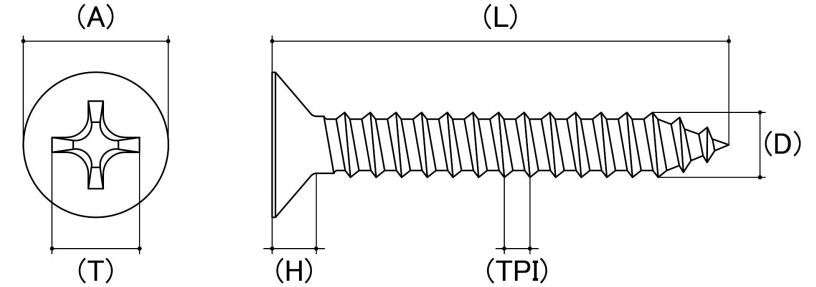

Size	Thread Pitch (TPI)	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Countersunk Angle	Driver Bit Size (AS)	sku (Part Number)
		Min	Max	Min	Max	Min	Max			
4g (2.90mm)	24 TPI	2.74	2.90	5.26	5.72	1.45	1.71	82°	PH1	01C4BZ
6g (3.50mm)	20 TPI	3.35	3.53	6.53	7.09	1.76	2.11	82°	PH2	01C6BZ
8g (4.20mm)	18 TPI	4.04	4.22	7.83	8.39	2.14	2.54	82°	PH2	01C8BZ
10g (4.80mm)	16 TPI	4.62	4.80	9.12	9.66	2.57	2.95	82°	PH3	01C10BZ
12g (5.50mm)	14 TPI	5.28	5.46	10.42	10.93	2.85	3.36	82°	PH3	01C12BZ
14g (6.30mm)	14 TPI	6.02	6.30	12.12	12.88	3.43	3.89	82°	PH3	01C14BZ

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026