

Disclaimer: Images are for illustrative purposes.

Self Tapping Screw

Head Style: Countersunk Head


Drive Type: Phillips

Class Grade: A2-70 G304

Material: Stainless Steel

Corrosion Protection Level: Excellent

Standard: AB ANSI B18.6.4

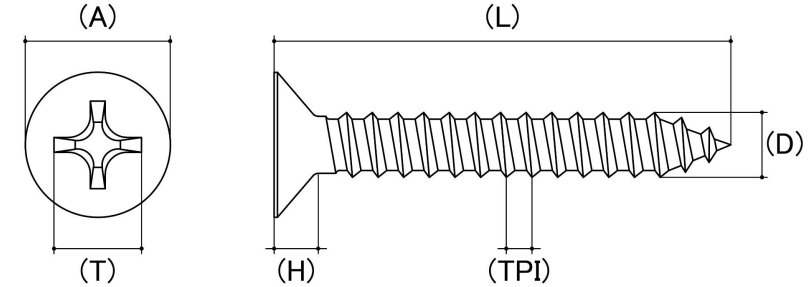

Size	Thread Pitch (TPI)	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Countersunk Angle	Driver Bit Size (AS)	sku (Part Number)
		Min	Max	Min	Max	Min	Max			
2g (2.20mm)	32 TPI	2.08	2.24	3.65	4.11	1.02	1.30	82°	PH1	01CS2
4g (2.90mm)	24 TPI	2.74	2.90	4.85	5.38	1.45	1.71	82°	PH1	01CS4
6g (3.50mm)	20 TPI	3.35	3.53	6.05	6.66	1.76	2.11	82°	PH2	01CS6
8g (4.20mm)	18 TPI	4.04	4.22	7.24	7.93	2.14	2.54	82°	PH2	01CS8
10g (4.80mm)	16 TPI	4.62	4.80	8.46	9.20	2.49	2.95	82°	PH2	01CS10
12g (5.50mm)	14 TPI	5.28	5.46	9.71	10.47	2.85	3.36	82°	PH3	01CS12
14g (6.30mm)	14 TPI	6.02	6.30	10.85	11.74	3.21	3.76	82°	PH3	01CS14

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026