

Disclaimer: Images are for illustrative purposes.

Countersunk Screw Anchor

Head Style: Countersunk Head


Material: Carbon Steel

Class Grade: Low Tensile Class 5.8

Material Finish: Galvanised

Corrosion Protection Level: Excellent

Internal External: External

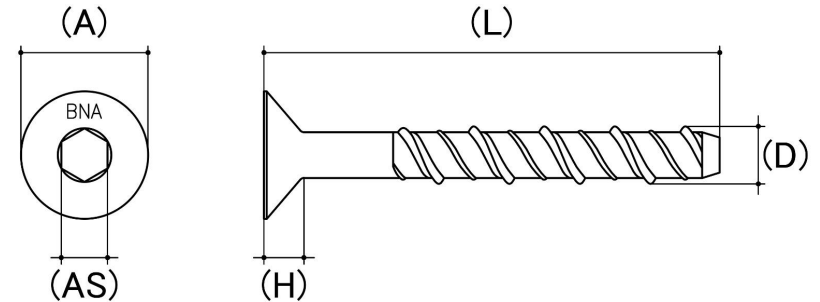

Size	Length (L) (mm)	Head Diameter (A) (mm)	Head Height (H) (mm)		Min Hole Dia (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Drill Hole Size (mm)	Drive Size (AS) (mm)	sku (Part Number)
			Min	Max						
M6	50	16.10	6.30	6.50	8	25	40	6	5	65CSB650G
M6	75	16.10	6.30	6.50	8	25	40	6	5	65CSB675G
M8	50	20.40	7.50	7.70	11	40	40	8	6	65CSB850G
M8	75	20.40	7.50	7.70	11	40	40	8	6	65CSB875G
M8	100	20.40	7.50	7.70	11	40	40	8	6	65CSB8100G
M10	60	24.00	9.30	9.50	13	50	50	10	8	65CSB1060G
M10	75	24.00	9.30	9.50	13	50	50	10	8	65CSB1075G
M10	100	24.00	9.30	9.50	13	50	50	10	8	65CSB10100G
M12	75	27.65	10.20	10.40	15	55	60	12	10	65CSB1275G
M12	100	27.65	10.20	10.40	15	55	60	12	10	65CSB12100G
M12	150	27.65	10.20	10.40	15	55	60	12	10	65CSB12150G

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026