

Disclaimer: Images are for illustrative purposes.

Countersunk Screw Anchor

Head Style: Countersunk Head


Material: Carbon Steel

Class Grade: Low Tensile Class 5.8

Material Finish: Zinc Yellow Plated

Corrosion Protection Level: Moderate

Internal External: Internal

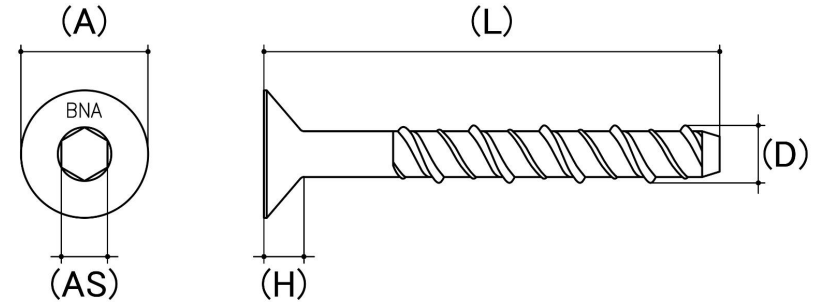

Size	Length (L) (mm)	Head Diameter (A) (mm)	Head Height (H) (mm)		Min Hole Dia (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Drill Hole Size (mm)	Drive Size (AS) (mm)	sku (Part Number)
			Min	Max						
M6	50	16.10	5.20	5.40	8	25	40	6	5	65CSB650
M6	75	16.10	5.20	5.40	8	25	40	6	5	65CSB675
M8	50	20.40	7.30	7.50	11	40	40	8	6	65CSB850
M8	75	20.40	7.30	7.50	11	40	40	8	6	65CSB875
M8	100	20.40	7.30	7.50	11	40	40	8	6	65CSB8100
M10	60	24.00	8.50	8.70	13	50	50	10	8	65CSB1060
M10	75	24.00	8.50	8.70	13	50	50	10	8	65CSB1075
M10	100	24.00	8.50	8.70	13	50	50	10	8	65CSB10100
M12	75	27.65	10.00	10.20	15	55	60	12	10	65CSB1275
M12	100	27.65	10.00	10.20	15	55	60	12	10	65CSB12100
M12	150	27.65	10.00	10.20	15	55	60	12	10	65CSB12150

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026