

Disclaimer: Images are for illustrative purposes.

Socket Allen Screw

Head Style: Countersunk Head

Drive Type: Internal Hex


Thread Type: Metric - Coarse

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Standard: DIN 7991 / ISO 10642

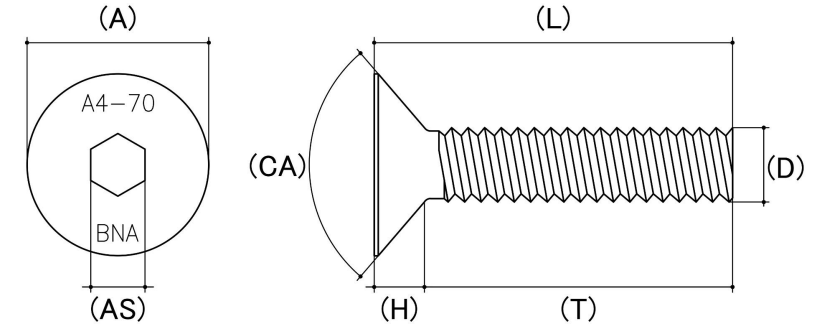

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Countersunk Angle	Driver Bit Size (AS) (mm)	sku (Part Number)
			Min	Max	Min	Max	Min	Max			
M2	0.40mm	Coarse	1.88	1.98	3.85	4.00	1.50mm	-	90°	1	31CS2M
M2.5	0.45mm	Coarse	2.38	2.48	4.82	5.00	1.86mm	-	90°	1	31CS25M
M3	0.50mm	Coarse	2.87	2.98	5.54	6.00	1.96mm	-	90°	2	31CS3M
M4	0.70mm	Coarse	3.83	3.97	7.53	8.00	2.48mm	-	90°	2	31CS4M
M5	0.80mm	Coarse	4.82	5.00	9.43	10.00	3.44mm	-	90°	3	31CS5M
M6	1.00mm	Coarse	5.82	6.00	11.34	12.00	3.72mm	-	90°	4	31CS6M
M8	1.25mm	Coarse	7.78	8.00	15.24	16.00	4.96mm	-	90°	5	31CS8M
M10	1.50mm	Coarse	9.78	10.00	19.22	20.60	6.20mm	-	90°	6	31CS10M
M12	1.75mm	Coarse	11.73	12.00	23.12	24.00	7.44mm	-	90°	8	31CS12M
M14	2.00mm	Coarse	13.73	14.00	26.73	27.00	7.50	8.10	90°	10	31CS14M
M16	2.00mm	Coarse	15.73	16.00	29.48	30.00	8.50mm	-	90°	10	31CS16M

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.