

Disclaimer: Images are for illustrative purposes.

D-Lock Hex Flange Bolt

Thread Type: Metric - Coarse

Thread Direction: Right Hand


Material: Carbon Steel

Class / Grade: High Tensile Class 12.9

Finish Coating: Zinc Flake Silver

Corrosion Protection Level: Excellent

Standard: HEC / CL12.9

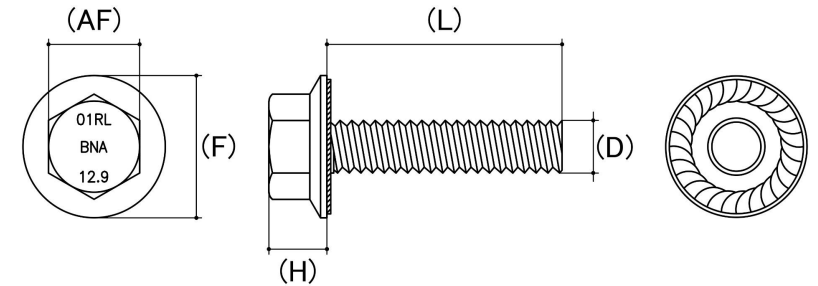

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Height (H) (mm)		Flange Diameter (F) (mm)		Across Flats (AF) (mm)		Spanner Size (AF) (mm)	sku (Part Number)
			Min	Max	Min	Max	Min	Max	Min	Max		
M8	1.25mm	Coarse	7.70	8.00	7.00	7.40	17.10	17.70	12.73	13.00	13mm	53HFLD8129ZF
M10	1.50mm	Coarse	9.78	10.00	8.70	9.30	20.20	21.00	14.73	15.00	15mm	53HFLD10129ZF
M12	1.75mm	Coarse	11.73	12.00	11.00	11.40	24.10	24.80	16.73	17.00	17mm	53HFLD12129ZF
M16	2.00mm	Coarse	15.73	16.00	15.50	16.00	31.00	32.00	21.67	22.00	22mm	53HFLD16129ZF
M20	2.50mm	Coarse	19.67	20.00	17.80	18.40	38.00	39.00	26.67	27.00	27mm	53HFLD20129ZF

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026