

*Disclaimer: Images are for illustrative purposes.*

## Pop Blind Rivet

**Head Style:** Dome Head


**Shell Material:** Stainless G304

**Stem Material:** Stainless G304

**Corrosion Protection Level:** Excellent

**Standard:** DIN7337

**Comments:** When selecting the right rivet, start with hole size and grip range.

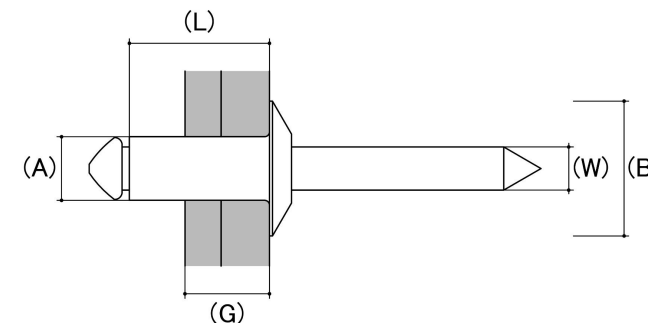

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	Tensile	Shear	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		Nom	Nom	
73 STST 4-1	3.20 (1/8)	6.30	5.00	0.80	1.60	1.70	2.00	3.30	2358	1868	73STST41
73 STST 4-2	3.20 (1/8)	6.30	6.40	1.60	3.20	1.70	2.00	3.30	2358	1868	73STST42
73 STST 4-3	3.20 (1/8)	6.30	8.00	3.20	4.80	1.70	2.00	3.30	2358	1868	73STST43
73 STST 4-4	3.20 (1/8)	6.30	10.00	4.80	6.40	1.70	2.00	3.30	2358	1868	73STST44
73 STST 4-5	3.20 (1/8)	6.30	11.40	6.40	8.00	1.70	2.00	3.30	2358	1868	73STST45
73 STST 4-6	3.20 (1/8)	6.30	12.70	8.00	9.60	1.70	2.00	3.30	2358	1868	73STST46
73 STST 4-8	3.20 (1/8)	6.30	16.00	9.60	12.70	1.70	2.00	3.30	2358	1868	73STST48
73 STST 4-10	3.20 (1/8)	6.30	19.00	12.70	16.00	1.70	2.00	3.30	2358	1868	73STST410
73 STST 5-1	4.00 (5/32)	7.65	5.80	0.80	1.60	2.10	2.50	4.10	2358	1868	73STST51
73 STST 5-2	4.00 (5/32)	8.00	8.00	0.80	3.20	2.10	2.50	4.10	2358	1868	73STST52
73 STST 5-3	4.00 (5/32)	8.00	10.00	3.20	4.80	2.10	2.50	4.10	2358	1868	73STST53
73 STST 5-4	4.00 (5/32)	8.00	11.40	4.80	6.40	2.10	2.50	4.10	2358	1868	73STST54
73 STST 5-5	4.00 (5/32)	8.00	12.70	6.40	8.00	2.10	2.50	4.10	2358	1868	73STST55
73 STST 5-6	4.00 (5/32)	8.00	14.50	8.00	9.60	2.10	2.50	4.10	2358	1868	73STST56
73 STST 5-8	4.00 (5/32)	8.00	16.50	9.60	12.70	2.10	2.50	4.10	2358	1868	73STST58

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	Tensile	Shear	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		Nom	Nom	
73 STST 5-10	4.00 (5/32)	8.00	20.00	14.00	16.00	2.10	2.50	4.10	2358	1868	73STST510
73 STST 6-2	4.80 (3/16)	9.35	8.00	0.80	3.20	2.50	2.90	4.90	2358	1868	73STST62
73 STST 6-3	4.80 (3/16)	9.35	10.00	3.20	4.80	2.50	2.90	4.90	2358	1868	73STST63
73 STST 6-4	4.80 (3/16)	9.35	11.40	4.80	6.40	2.50	2.90	4.90	2358	1868	73STST64
73 STST 6-5	4.80 (3/16)	9.35	12.70	6.40	8.00	2.50	2.90	4.90	2358	1868	73STST65
73 STST 6-6	4.80 (3/16)	9.35	14.50	8.00	9.60	2.50	2.90	4.90	2358	1868	73STST66
73 STST 6-8	4.80 (3/16)	9.35	17.50	9.60	12.70	2.50	2.90	4.90	2358	1868	73STST68
73 STST 6-10	4.80 (3/16)	9.35	20.60	12.70	16.00	2.50	2.90	4.90	2358	1868	73STST610
73 STST 6-12	4.80 (3/16)	9.35	24.10	15.90	19.10	2.50	2.90	4.90	2358	1868	73STST612
73 STST 8-4	6.40 (1/4)	12.50	12.70	3.20	6.40	3.65	3.90	6.50	2358	1868	73STST84
73 STST 8-6	6.40 (1/4)	12.50	15.90	6.40	9.60	3.65	3.90	6.50	2358	1868	73STST86
73 STST 8-8	6.40 (1/4)	12.50	19.10	9.60	12.70	3.65	3.90	6.50	2358	1868	73STST88
73 STST 8-10	6.40 (1/4)	12.50	22.20	12.70	16.00	3.65	3.90	6.50	2358	1868	73STST810
73 STST 8-12	6.40 (1/4)	12.50	25.40	15.90	19.10	3.65	3.90	6.50	2358	1868	73STST812

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026