

Disclaimer: Images are for illustrative purposes.

Dome Screw Anchor

Head Style: Dome Head


Material: Carbon Steel

Class Grade: Low Tensile Class 5.8

Material Finish: Galvanised

Corrosion Protection Level: Excellent

Internal External: External

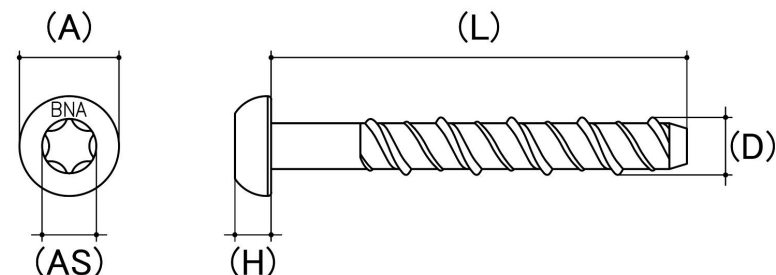

Size	Length (L) (mm)	Head Diameter (A) (mm)	Head Height (H) (mm)	Min Hole Dia (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Drive Size (AS)	sku (Part Number)
M6	65	16.00	4.50	8	25	40	5	6	T30	65SBT665G
M6	75	16.00	4.50	8	25	40	50	6	T30	65SBT675G
M6	100	16.00	4.50	8	25	40	75	6	T30	65SBT6100G
M8	60	18.00	5.85	10	40	40	20	8	T40	65SBT860G
M8	75	18.00	5.85	10	40	40	35	8	T40	65SBT875G
M8	100	18.00	5.85	10	40	40	60	8	T40	65SBT8100G
M10	75	22.00	7.50	12	50	50	25	10	T50	65SBT1075G
M10	100	22.00	7.50	12	50	50	50	10	T50	65SBT10100G
M10	150	22.00	7.50	12	50	50	100	10	T50	65SBT10150G

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026