

Disclaimer: Images are for illustrative purposes.


Double Thread Lag Screw

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Comments: Take care when installing into hardwood. Pilot hole may be required.

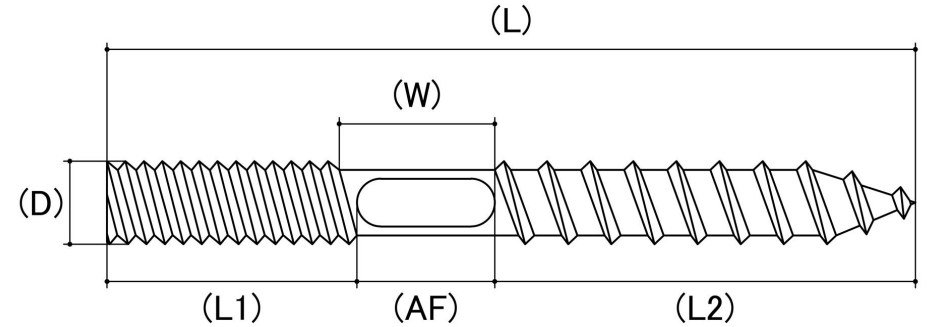

Size	Thread Pitch (mm)	Thread Type	Length L (1) (mm)	Length L (2) (mm)	Inside Width (W) (mm)	Spanner Flats (AF) (mm)	sku (Part Number)
M8	1.25mm	Coarse	40.00	47.00	13.00	5.80	62DTLS8100M
M10	1.50mm	Coarse	20.00	35.00	5.00	7.20	62DTLS1060M
M10	1.50mm	Coarse	20.00	50.00	10.00	7.20	62DTLS1080M
M10	1.50mm	Coarse	30.00	57.00	13.00	7.20	62DTLS10100M
M12	1.75mm	Coarse	23.00	37.00	10.00	8.20	62DTLS1270M
M12	1.75mm	Coarse	25.00	45.00	10.00	7.80	62DTLS1280M
M12	1.75mm	Coarse	34.00	56.00	10.00	8.70	62DTLS12100M
M12	1.75mm	Coarse	38.00	60.00	12.00	8.22	62DTLS12110M
M12	1.75mm	Coarse	46.00	63.00	11.00	7.80	62DTLS12120M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2026