

*Disclaimer: Images are for illustrative purposes.*

## ETA Approved Screw Anchor

**Head Style:** Hex Flange Head

**Material:** Bi-Metal Stainless


**Class Grade:** A4-70 G316

**Material Finish:** Stainless Steel

**Corrosion Protection Level:** Ultimate

**Internal External:** External

**Seismic Assessment:** No

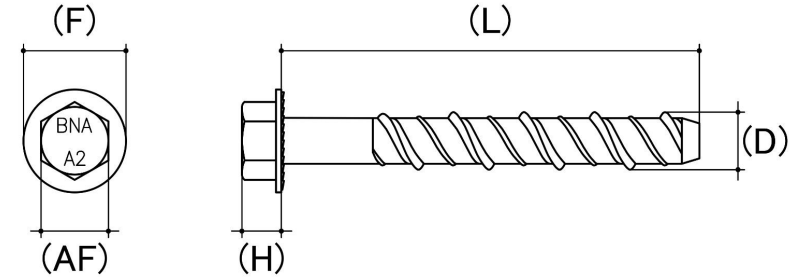

Size	Length (L) (mm)	Flange Diameter (F) (mm)	Head Height (H) (mm)	Min Hole Dia (mm)	Embedment Depth (mm)	Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (Part Number)
M6	80	12	5.80	9	55	20	65	6	10mm	65SBS680PM
M8	90	16	7.50	11	65	30	75	8	13mm	65SBS890PM
M8	100	16	7.50	11	65	35	75	8	13mm	65SBS8100PM
M10	105	21	9.10	13	75	25	85	10	15mm	65SBS10105PM
M10	120	21	9.10	13	75	65	85	10	15mm	65SBS10120PM
M12	150	25	11.00	15	95	55	105	12	17mm	65SBS12150PM

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026