

*Disclaimer: Images are for illustrative purposes.*

## Self Drilling Metal Screw

**Head Style:** Hex Flange Head

**Drive Type:** Hex

**Neo:** Yes


**Material:** Hardened Steel

**Class Grade:** Class 4 / B8® Cat 5

**Finish:** Galvanised

**Corrosion Protection Level:** Excellent

**Internal External:** External

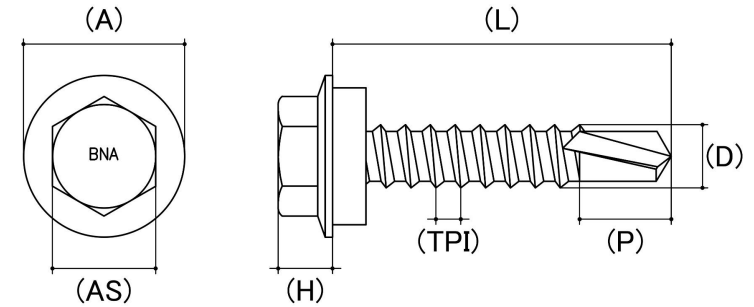

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Drill Point Length (P) (mm)	Min To Max Steel Thickness (mm)		Single Shear (kN)	Axial Tensile (kN)	Torsional (Nm)	Driver Bit Size (AS) (inches)	Colour	sku (Part Number)
			Min	Max	Min	Max	Nom	Nom	Min	Max	Nom	Nom	Nom			
8g (4.20mm)	18 TPI	Coarse	4.00	4.20	9.70	10.00	4.00	6.00	0.75	2.50	5.800	6.500	5.900	1/4	Grey	0881812C4N
10g (4.80mm)	16 TPI	Coarse	4.65	4.80	11.10	11.40	4.75	4.80	0.75	3.50	6.300	11.100	8.300	5/16	Grey	08101616C4N
12g (5.50mm)	14 TPI	Coarse	5.30	5.40	14.10	14.40	5.85	6.60	1.00	5.00	8.400	14.400	13.100	5/16	Grey	08121420C4N
14g (6.30mm)	10 TPI	Coarse	6.20	6.40	14.10	14.40	6.40	8.80	1.20	5.00	11.100	20.300	20.800	3/8	Grey	08C4N14
14g (6.30mm)	20 TPI	Fine	6.00	6.40	14.10	14.40	6.40	8.80	1.20	6.00	10.300	19.500	23.800	3/8	Grey	08C4N1420

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026