

Disclaimer: Images are for illustrative purposes.


Hook Hook Turnbuckle

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Comments: Use an anti-seize lubricant on the thread to reduce thread seizing. This product is not rated. Breaking loads information provided is to be used as a guide only.

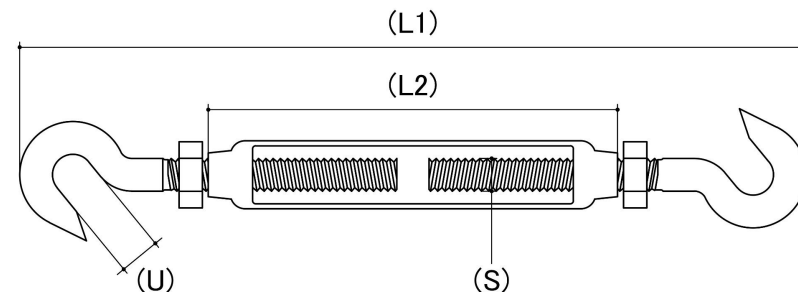

Size	Thread Pitch (mm)	Thread Type	Length L (1) (mm)	Length L (2) (mm)	Length Unwound (mm)	Inside Dia. of Hook (U) (mm)	Breaking Load Kgs (Not Rated Guide only)	sku (Part Number)
					Nom	Nom	Nom	
M4	0.70mm	Coarse	98.00	55.00	162.00	9.00	100	62TBSSH455M
M5	0.80mm	Coarse	120.00	70.00	184.00	9.00	130	62TBSSH570M
M6	1.00mm	Coarse	160.00	90.00	232.00	10.00	350	62TBSSH690M
M8	1.25mm	Coarse	200.00	120.00	289.00	11.00	650	62TBSSH8120M
M10	1.50mm	Coarse	240.00	150.00	368.00	12.00	800	62TBSSH10150M
M12	1.75mm	Coarse	300.00	200.00	476.00	18.00	1400	62TBSSH12200M
M16	2.00mm	Coarse	390.00	250.00	625.00	25.00	-	62TBSSH16250M
M20	2.50mm	Coarse	510.00	300.00	736.00	28.00	-	62TBSSH20300M

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2026