

Disclaimer: Images are for illustrative purposes.

Anlock Mega Lock Structural Rivet


Head Style: Dome Head

Shell Material: Stainless G304

Stem Material: Stainless G304

Corrosion Protection Level: Excellent

Comments: When selecting the right rivet, start with hole size and grip range.

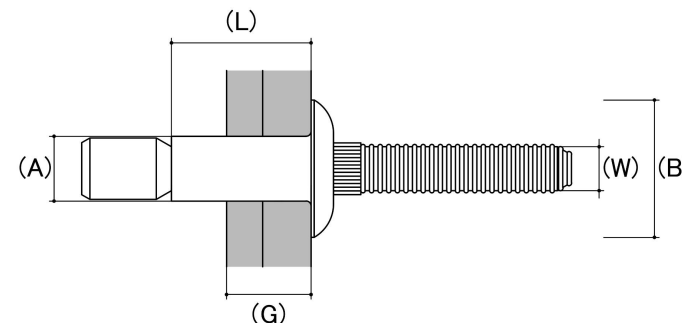

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)	Hole Size (mm)		Tensile	Shear	Breaking Load	Retention Load	sku (Part Number)
		Nom	Nom	Min	Max	Nom	Min	Max	Nom	Nom	Nom	Nom	
73 ANSTST 6-4	4.80 (3/16)	10.20	10.00	1.60	6.90	3.10	4.90	5.10	4800	6000	6500	445	73ANSTST64
73 ANSTST 6-6	4.80 (3/16)	10.20	14.00	1.60	11.00	3.10	4.90	5.10	4800	6000	6500	445	73ANSTST66
73 ANSTST 8-6	6.40 (1/4)	13.50	14.00	2.00	9.50	4.10	6.70	6.90	8010	10500	12000	890	73ANSTST86
73 ANSTST 8-10	6.40 (1/4)	13.50	19.00	2.00	15.90	4.10	6.70	6.90	8010	10500	12000	890	73ANSTST810

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026