

*Disclaimer: Images are for illustrative purposes.*

## Tapcon

**Head Style:** Hex Flange Head

**Pre Drilling:** Masonry = Yes, Timber = No


**Material:** Carbon Steel

**Class Grade:** Low Tensile Class 5.8

**Material Finish:** R1000 Silver Coating

**Corrosion Protection Level:** Excellent

**Internal External:** External

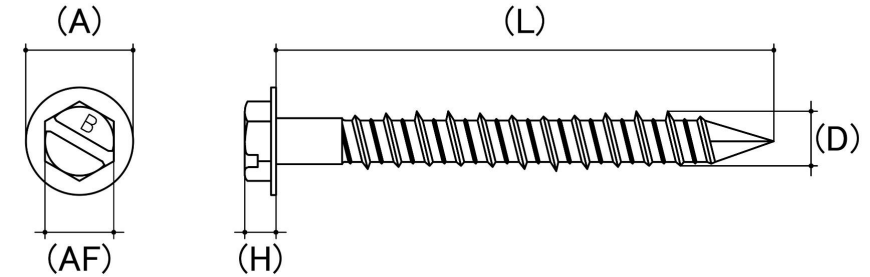

Size	Length (L) (mm)	Head Diameter (A) (mm)		Pilot Drill Size (mm)	Drill Hole Size (mm)	Drive Size (AS) (inches)	sku (Part Number)
		Min	Max				
M6.5	32	10.50	10.70	6	5	5/16	65TC6532R
M6.5	45	10.50	10.70	6	5	5/16	65TC6545R
M6.5	58	10.50	10.70	6	5	5/16	65TC6558R
M6.5	70	10.50	10.70	6	5	5/16	65TC6570R
M6.5	83	10.50	10.70	6	5	5/16	65TC6583R
M6.5	100	10.50	10.70	6	5	5/16	65TC65100R

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026