

Vortex Roofing Screw

Head Style: Hex Flange Head

Drive Type: Hex

Neo: Yes

Material: Hardened Steel


Class Grade: B8® Cat 5

Finish: Revolution B8® Coating

Corrosion Protection Level: Ultimate

Internal External: External

Product Note: Designed for fixing into Metal and Soft Timbers upto 1.50mm thick

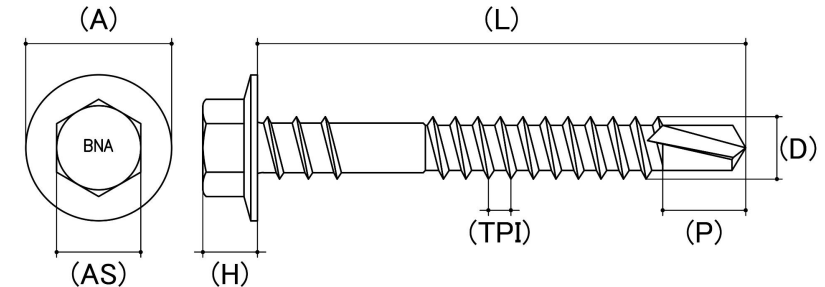

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Drill Point Length (P) (mm)	Min To Max Steel Thickness (mm)	Driver Bit Size (AS) (inches)	Colour	sku (Part Number)
			Min	Max	Min	Max	Nom	Nom	Nom			
M6.2	13 TPI	Coarse	6.10	6.20	14.10	14.40	6.60	6.25	1.50	5/16	Grey	08VUR6213B8
M6.2	13 TPI	Coarse	6.10	6.20	14.10	14.40	6.60	6.25	1.50	5/16	Grey	08VUR6213B8

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 23 Mar 2026