

*Disclaimer: Images are for illustrative purposes.*

## Collated Plasterboard Timber Screw

**Head Style:** Bugle Head

**Drive Type:** Phillips

**Screw Point:** Needle Point


**Material:** Carbon Steel SAE 1022

**Class Grade:** Class 2

**Finish:** Zinc Yellow

**Corrosion Protection Level:** Moderate

**Internal External:** Internal

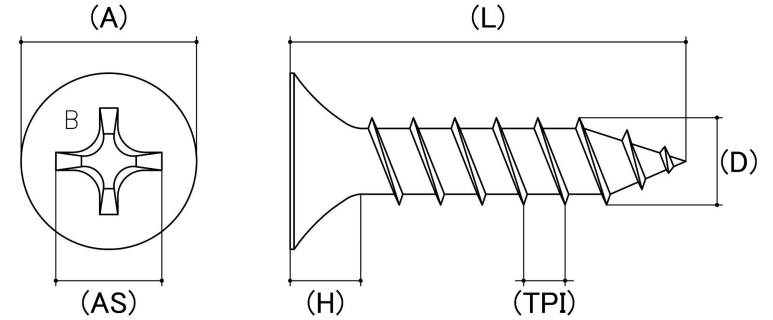

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Min To Max Steel Thickness (mm)		Single Shear (kN)	Axial Tensile (kN)	Torsional (Nm)	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Min	Max	Min	Max					
6g (3.50mm)	18 TPI	Fine	3.40	3.50	8.20	8.40	3.00	3.20	0.42	1.00	3.300	5.500	3.600	PH2	07BUCO
6g (3.50mm)	9 TPI	Coarse	3.40	3.50	8.20	8.40	3.00	3.20	-	-	3.000	5.100	3.400	PH2	07BUCCO

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026