

*Disclaimer: Images are for illustrative purposes.*

## Machine Screw

**Head Style:** Countersunk Head

**Drive Type:** Torx


**Thread Type:** Metric - Coarse

**Material:** Stainless Steel

**Class Grade:** A2-70 G304

**Corrosion Protection Level:** Excellent

**Standard:** ISO10642

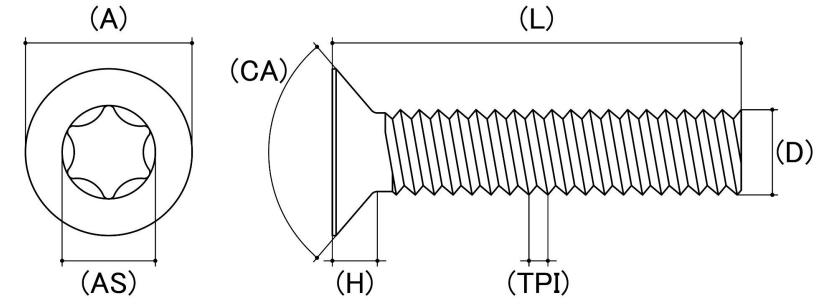

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Countersunk Angle	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Nom			
M3	0.50mm	Coarse	2.87	2.98	5.60	6.72	1.86	90°	T10	21CTS3
M4	0.70mm	Coarse	3.83	3.97	7.53	9.20	2.48	90°	T20	21CTS4
M5	0.80mm	Coarse	4.82	5.00	9.43	10.00	3.10	90°	T25	21CTS5
M6	1.00mm	Coarse	5.82	6.00	11.34	12.00	3.72	90°	T30	21CTS6
M8	1.25mm	Coarse	7.78	8.00	15.24	16.00	4.96	90°	T45	21CTS8

**Disclaimer:**

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026