

Disclaimer: Images are for illustrative purposes.

Pop Blind Rivet

Head Style: Dome Head


Shell Material: Stainless G316

Stem Material: Stainless G316

Corrosion Protection Level: Ultimate

Standard: DIN7337

Comments: When selecting the right rivet, start with hole size and grip range.

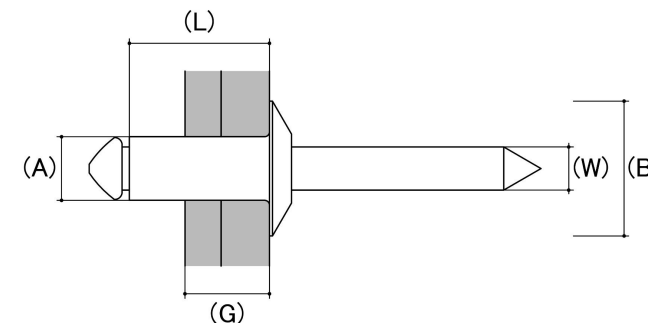

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	Tensile	Shear	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		Nom	Nom	
73 STST 4-2M	3.20 (1/8)	6.30	6.50	1.60	3.20	1.70	2.00	3.30	2358	1868	73STST42M
73 STST 4-3M	3.20 (1/8)	6.30	8.00	3.20	4.80	1.70	2.00	3.30	2358	1868	73STST43M
73 STST 4-4M	3.20 (1/8)	6.30	9.50	4.80	6.40	1.70	2.00	3.30	2358	1868	73STST44M
73 STST 4-5M	3.20 (1/8)	6.30	11.40	6.40	8.00	1.70	2.00	3.30	2358	1868	73STST45M
73 STST 4-6M	3.20 (1/8)	6.30	12.50	8.00	9.50	1.70	2.00	3.30	2358	1868	73STST46M
73 STST 4-8M	3.20 (1/8)	6.30	16.00	9.60	12.70	1.70	2.00	3.30	2358	1868	73STST48M
73 STST 5-2M	4.00 (5/32)	8.00	8.00	0.80	3.20	2.10	2.50	4.10	3648	2891	73STST52M
73 STST 5-3M	4.00 (5/32)	8.00	10.00	3.20	4.80	2.10	2.50	4.10	3648	2891	73STST53M
73 STST 5-4M	4.00 (5/32)	8.00	11.40	4.80	6.40	2.10	2.50	4.10	3648	2891	73STST54M
73 STST 5-5M	4.00 (5/32)	8.00	11.80	6.40	7.90	2.10	2.50	4.10	3648	2891	73STST55M
73 STST 5-6M	4.00 (5/32)	8.00	13.30	8.00	9.50	2.10	2.50	4.10	3648	2891	73STST56M
73 STST 5-8M	4.00 (5/32)	8.00	16.50	9.50	12.70	2.10	2.50	4.10	3648	2891	73STST58M
73 STST 6-2M	4.80 (3/16)	9.35	7.60	0.00	3.20	2.50	2.90	4.90	5338	4226	73STST62M
73 STST 6-3M	4.80 (3/16)	9.35	9.20	3.20	4.80	2.50	2.90	4.90	5338	4226	73STST63M
73 STST 6-4M	4.80 (3/16)	9.35	10.80	4.80	6.40	2.50	2.90	4.90	5338	4226	73STST64M

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	Tensile	Shear	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		Nom	Nom	
73 STST 6-5M	4.80 (3/16)	9.35	12.40	6.40	7.90	2.50	2.90	4.90	5338	4226	73STST65M
73 STST 6-6M	4.80 (3/16)	9.35	14.50	8.00	9.50	2.50	2.90	4.90	5338	4226	73STST66M
73 STST 6-8M	4.80 (3/16)	9.35	17.20	9.50	12.70	2.50	2.90	4.90	5338	4226	73STST68M
73 STST 6-10M	4.80 (3/16)	9.35	20.30	12.70	15.90	2.50	2.90	4.90	5338	4226	73STST610M
73 STST 6-12M	4.80 (3/16)	9.35	23.50	15.90	19.10	2.50	2.90	4.90	5338	4226	73STST612M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026