

Disclaimer: Images are for illustrative purposes.

Self Drilling Metal Screw

Head Style: Hex Flange Head

Drive Type: Hex


Material: Hardened Steel

Class Grade: Class 2

Finish: Zinc Yellow

Corrosion Protection Level: Moderate

Internal External: Internal

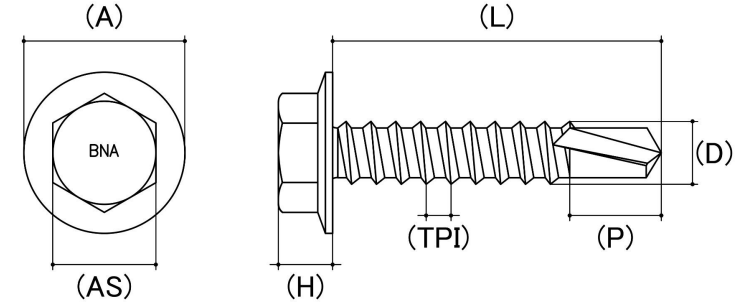

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Drill Point Length (P) (mm)	Min To Max Steel Thickness (mm)		Single Shear (kN)	Axial Tensile (kN)	Torsional (Nm)	Driver Bit Size (AS) (inches)	Colour	sku (Part Number)
			Min	Max	Min	Max	Nom	Nom	Min	Max	Nom	Nom	Nom			
8g (4.20mm)	18 TPI	Coarse	4.00	4.20	9.70	10.00	4.00	6.00	0.75	2.50	5.800	6.500	5.900	1/4	Gold	0881812ZY
10g (4.80mm)	16 TPI	Coarse	4.65	4.80	11.10	11.40	4.75	4.80	0.75	3.50	6.300	11.100	8.300	5/16	Gold	08101616ZY
12g (5.50mm)	14 TPI	Coarse	5.30	5.40	14.10	14.40	5.85	6.60	1.00	5.00	8.400	14.400	13.100	5/16	Gold	08121420ZY
14g (6.30mm)	10 TPI	Coarse	6.20	6.40	14.10	14.40	6.40	8.80	1.20	5.00	11.100	20.300	20.800	3/8	Gold	081410ZY
14g (6.30mm)	20 TPI	Fine	6.00	6.40	14.10	14.40	6.40	8.80	1.20	6.00	10.300	19.500	23.800	3/8	Gold	081420ZY

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026