

Disclaimer: Images are for illustrative purposes.

Pop Blind Rivet

Head Style: Large Flange Head


Shell Material: Aluminium

Stem Material: Steel Zinc Plated

Corrosion Protection Level: Moderate

Standard: DIN7337

Comments: When selecting the right rivet, start with hole size and grip range.

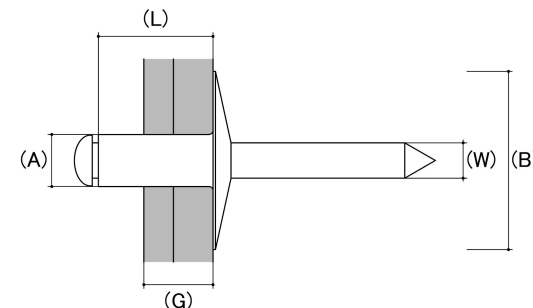

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		
73 ASL 4-2	3.20 (1/8)	9.25	6.40	0.80	3.20	1.70	2.00	3.30	73ASL42
73 ASL 4-3	3.20 (1/8)	9.25	8.00	3.20	4.80	1.70	2.00	3.30	73ASL43
73 ASL 4-4	3.20 (1/8)	9.25	10.00	4.80	6.40	1.70	2.00	3.30	73ASL44
73 ASL 4-5	3.20 (1/8)	9.25	11.50	6.40	8.00	1.70	2.00	3.30	73ASL45
73 ASL 4-6	3.20 (1/8)	9.25	12.70	8.00	9.60	1.70	2.00	3.30	73ASL46
73 ASL 4-8	3.20 (1/8)	9.25	16.00	9.60	12.70	1.70	2.00	3.30	73ASL48
73 ASL 5-2	4.00 (5/32)	11.70	7.00	0.80	3.20	2.10	2.50	4.10	73ASL52
73 ASL 5-3	4.00 (5/32)	11.70	8.50	3.20	4.80	2.10	2.50	4.10	73ASL53
73 ASL 5-4	4.00 (5/32)	11.70	11.40	4.80	6.40	2.10	2.50	4.10	73ASL54
73 ASL 5-6	4.00 (5/32)	11.70	14.50	8.00	9.60	2.10	2.50	4.10	73ASL56
73 ASL 5-8	4.00 (5/32)	11.70	16.50	9.60	12.70	2.10	2.50	4.10	73ASL58
73 ASL 6-3	4.80 (3/16)	15.80	10.00	3.20	4.80	2.50	2.90	4.90	73ASL63
73 ASL 6-4	4.80 (3/16)	15.80	11.40	6.40	8.00	2.50	2.90	4.90	73ASL64
73 ASL 6-5	4.80 (3/16)	15.80	12.50	6.40	8.00	2.50	2.90	4.90	73ASL65
73 ASL 6-6	4.80 (3/16)	15.80	14.50	8.00	9.60	2.50	2.90	4.90	73ASL66

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		
73 ASL 6-8	4.80 (3/16)	15.80	17.50	9.60	12.70	2.50	2.90	4.90	73ASL68
73 ASL 6-10	4.80 (3/16)	15.80	20.60	12.70	16.00	2.50	2.90	4.90	73ASL610
73 ASL 6-12	4.80 (3/16)	15.80	25.40	16.00	19.00	2.50	2.90	4.90	73ASL612
73 ASL 6-14	4.80 (3/16)	15.80	27.00	19.00	22.00	2.50	2.90	4.90	73ASL614
73 ASL 6-16	4.80 (3/16)	15.80	31.00	22.00	25.40	2.50	2.90	4.90	73ASL616

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026