

Allthread / Threaded Rod

Thread Type: UNC / BSW - Coarse


Thread Direction: Right Hand

Material Finish: Stainless Steel

Class / Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Standard: IFI 136C

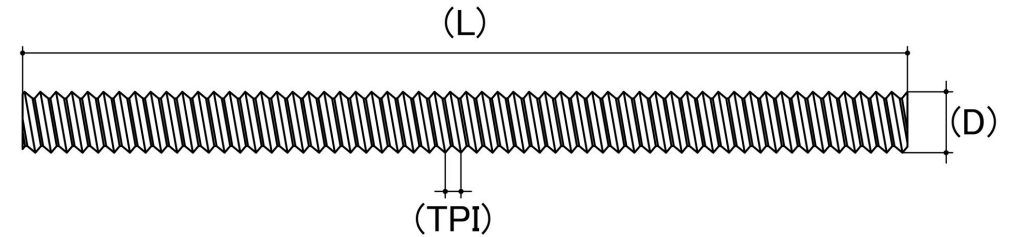

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Allthread Length (L) (mm)	sku (Part Number)
			Min	Max		
1/8"	40 TPI	Coarse	3.02	3.20	914	54SC183M
3/16"	24 TPI	Coarse	4.60	4.81	914	54SC3163M
1/4"	20 TPI	Coarse	6.15	6.33	914	54SC143M
5/16"	18 TPI	Coarse	7.78	7.93	914	54SC5163M
3/8"	16 TPI	Coarse	9.38	9.53	914	54SC383M
7/16"	14 TPI	Coarse	10.93	11.13	914	54SC7163M
1/2"	13 TPI	Coarse	12.53	12.70	914	54SC123M
9/16"	12 TPI	Coarse	14.08	14.28	914	54SC9163M
5/8"	11 TPI	Coarse	15.68	15.88	914	54SC583M
3/4"	10 TPI	Coarse	18.83	19.05	914	54SC343M
7/8"	9 TPI	Coarse	21.85	22.36	914	54SC783M
1"	8 TPI	Coarse	25.15	25.40	914	54SC13M
1-1/8"	7 TPI	Coarse	28.30	28.58	914	54SC1183M
1-1/4"	7 TPI	Coarse	31.48	31.75	914	54SC1143M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.