

*Disclaimer: Images are for illustrative purposes.*

## Hand Tap


**Product Type:** Bottoming Tap

**Thread Type:** UNC / BSW - Coarse

**Material:** High Speed Steel

**Standard:** ISO529

**Product Brand:** Alpha

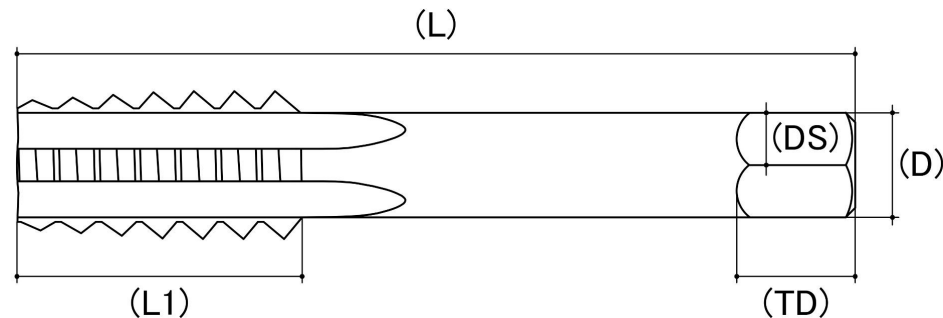

Size	Thread Pitch (TPI)	Thread Type	Length (L) (mm)	Drive Square (DS) (mm)	Tapping Drill Size (mm)	sku (Part Number)
			Nom		Nom	
#5-40	40 TPI	Coarse	40	2	2.60	14C540BA
#6-32	32 TPI	Coarse	50	3	2.80	14C632BA
#8-32	32 TPI	Coarse	53	3	3.50	14C832BA
#10-24 (3/16")	24 TPI	Coarse	58	4	3.90	14C1024BA
#12-24	24 TPI	Coarse	62	4	4.50	14C1224BA
1/4"	20 TPI	Coarse	66	4	5.10	14C14BA
5/16"	18 TPI	Coarse	72	4	6.60	14C516BA
3/8"	16 TPI	Coarse	80	5	8.00	14C38BA
7/16"	14 TPI	Coarse	85	6	9.40	14C716BA
1/2"	13 TPI	Coarse	89	7	10.80	14C12BA
9/16"	12 TPI	Coarse	95	9	12.10	14C916BA
5/8"	11 TPI	Coarse	102	9	13.50	14C58BA
3/4"	10 TPI	Coarse	112	11	16.50	14C34BA
7/8"	9 TPI	Coarse	118	14	19.50	14C78BA
1"	8 TPI	Coarse	130	14	22.00	14C1BA

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.