

*Disclaimer: Images are for illustrative purposes.*

## H-IT Strike Anchors

**Head Style:** Countersunk Head


**Material:** AISI 1040 Carbon Steel

**Class Grade:** High Tensile Class 10.9

**Material Finish:** Galvanised

**Corrosion Protection Level:** Excellent

**Internal External:** External

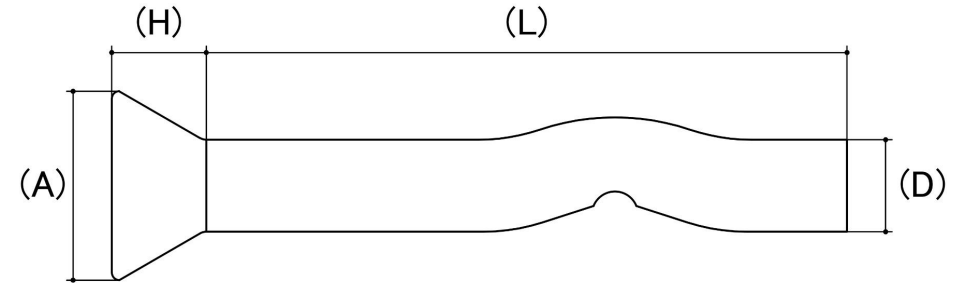

Size	Length (L) (mm)	Head Diameter (A) (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Drill Hole Size (mm)	sku (Part Number)
M5	65	11.00	25	50	5	65CHIT565G
M5	75	11.20	25	50	5	65CHIT575G
M5	100	11.20	30	50	5	65CHIT5100G
M6.5	38	11.80	25	65	6	65CHIT6538G
M6.5	50	12.00	25	65	6	65CHIT6550G
M6.5	65	12.00	25	65	6	65CHIT6565G
M6.5	75	12.00	30	65	6	65CHIT6575G
M6.5	100	12.00	30	65	6	65CHIT65100G

**Disclaimer:**

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026