

*Disclaimer: Images are for illustrative purposes.*

## Machine Screw

**Head Style:** Countersunk Head

**Drive Type:** Slot


**Thread Type:** Metric - Coarse

**Material:** Stainless Steel

**Class Grade:** A2-70 G304

**Corrosion Protection Level:** Excellent

**Standard:** DIN 963

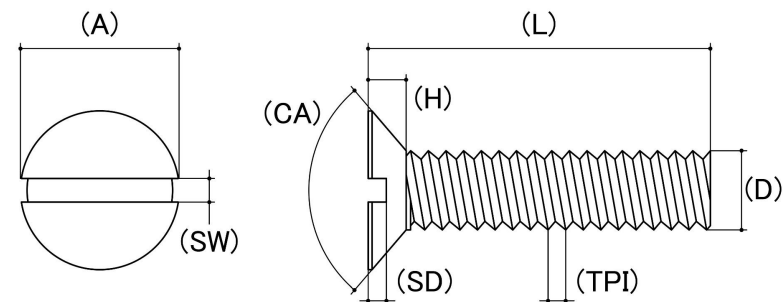

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Slot Width (SW) (mm)	Countersunk Angle	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Nom	Nom			
M3	0.50mm	Coarse	2.87	2.98	5.30	5.60	1.65	0.80	90°	SL5	21CSLS3
M4	0.70mm	Coarse	3.83	3.97	7.14	7.50	2.20	1.00	90°	SL6	21CSLS4
M5	0.80mm	Coarse	4.82	5.00	8.84	9.20	2.50	1.20	90°	SL8	21CSLS5
M6	1.00mm	Coarse	5.82	6.00	10.57	11.00	3.00	1.60	90°	SL10	21CSLS6

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026