Disclaimer:*Images are for illustrative purposes.*

INOX Drill Bit

System Of Measurement: Metric
Material: M2 High Speed Steel
Finish: TiAlN Coating
Product Brand: Alpha
Unique Features: 5 times the life of Cobalt drills in Stainless Steel

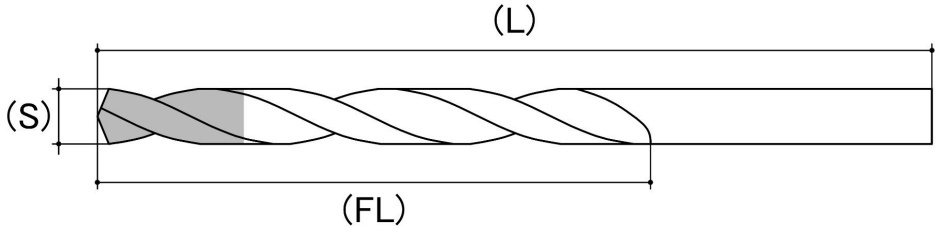

Size (S)	Drill Length (L) (mm)	Flute Length (FL) (mm)	Drill Chuck Size (inches)	Countersink Angle	Point	Suitable For	Packaging	sku (Part Number)
		Nom						
M1	34	12	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	121SPC
M1.5	42	19	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	121.5SPC
M2	48	23	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	122SPC
M2.5	56	29	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	122.5SPC
M3	62	20	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	123SPC
M3.3	65	23	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	123.3SPC
M3.5	70	24	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	123.5SPC
M4	75	27	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	124SPC
M4.2	75	28	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	124.2SPC
M4.5	80	29	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	124.5SPC
M5	86	35	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	125SPC
M5.5	93	38	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	125.5SPC
M6	94	40	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	126SPC
M6.5	100	45	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	126.5SPC
M6.8	109	47	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	126.8SPC
M7	109	48	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	127SPC

Size (S)	Drill Length (L) (mm)	Flute Length (FL) (mm)	Drill Chuck Size (inches)	Countersink Angle	Point	Suitable For	Packaging	sku (Part Number)
		Nom						
M7.5	110	49	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	127.5SPC
M8	117	52	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	128SPC
M8.5	117	55	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	128.5SPC
M9	124	60	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	129SPC
M9.5	125	60	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	129.5SPC
M10	132	65	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	1210SPC
M10.2	133	65	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	1210.2SPC
M10.5	134	66	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	1210.5SPC
M11	142	74	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	1211SPC
M11.5	142	75	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	1211.5SPC
M12	150	80	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	12M12SPC
M12.5	150	80	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	1212.5SPC
M13	150	82	Upto 1/2	40°	130° Split Point	Stainless,Steel & Aluminium	Carded	1213SPC

Disclaimer:
Dimensional data and technical information was obtained from publically avaliable sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2026