

Disclaimer: Images are for illustrative purposes.

Countersunk ETA Approved Screw Anchor

Head Style: Countersunk Head

Material: Bi-Metal Stainless


Class Grade: A4-70 G316

Material Finish: Stainless Steel

Corrosion Protection Level: Ultimate

Internal External: External

Seismic Assessment: No

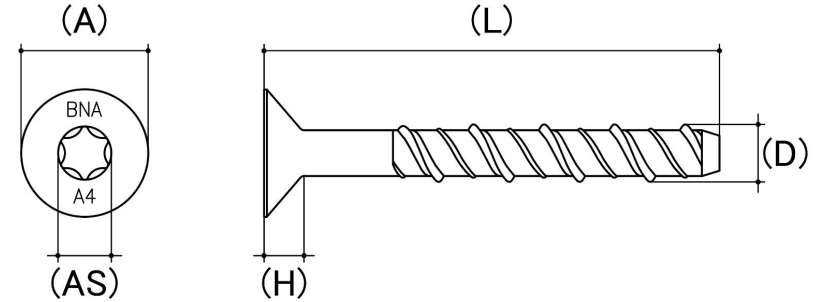

Size	Length (L) (mm)	Head Diameter (A) (mm)	Head Height (H) (mm)	Min Hole Dia (mm)	Embedment Depth (mm)	Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Drive Size (AS)	sku (Part Number)
M6	80	15.30	5.20	9	70	10	80	6	T40	65CSBTS680PM
M8	95	17.80	7.30	11	85	10	95	8	T45	65CSBTS895PM

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026