

Disclaimer: Images are for illustrative purposes.


Jaw Jaw Rigging Screw

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Comments: Use an anti-seize lubricant on the thread to reduce thread seizing. This product is not rated. Breaking loads information provided is to be used as a guide only.

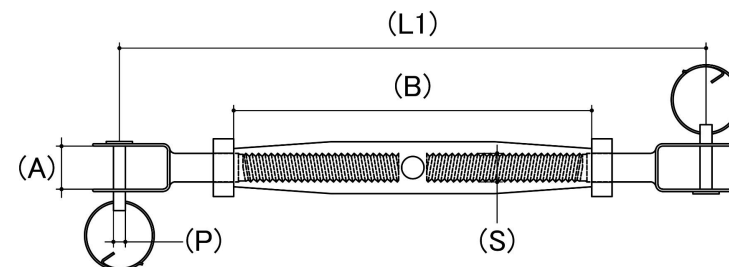

Size	Thread Pitch (mm)	Thread Type	Length L (1) (mm)	Inside Eye Width (W) (mm)	Body Length (mm)	Jaw Width (mm)	Pin Diameter (P) (mm)	Breaking Load Kgs (Not Rated Guide only)	sku (Part Number)
				Nom	Nom	Nom		Nom	
M5	0.80mm	Coarse	130.00	10.00	80.00	8.20	4.80	750	62RSSJJ5130M
M6	1.00mm	Coarse	150.00	10.00	95.00	9.20	5.80	1400	62RSSJJ6150M
M8	1.25mm	Coarse	180.00	11.00	105.00	11.00	7.80	2200	62RSSJJ8180M
M10	1.50mm	Coarse	220.00	14.00	125.00	15.00	8.90	3450	62RSSJJ10220M
M12	1.75mm	Coarse	270.00	21.00	150.00	15.00	11.80	5000	62RSSJJ12270M
M16	2.00mm	Coarse	300.00	26.00	190.00	22.00	14.00	8000	62RSSJJ16300M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2026