

Disclaimer: Images are for illustrative purposes.

Pop Blind Rivet

Head Style: Large Flange Head


Shell Material: Stainless G304

Stem Material: Stainless G304

Corrosion Protection Level: Excellent

Standard: DIN7337

Comments: When selecting the right rivet, start with hole size and grip range.

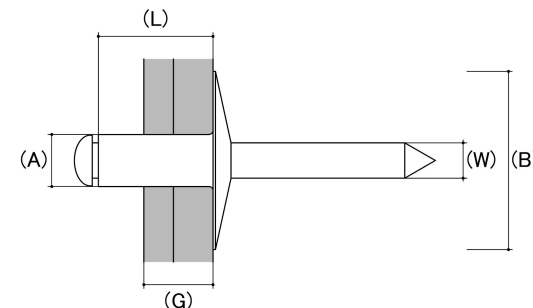

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	Tensile	Shear	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		Nom	Nom	
73 STSTL 4-2	3.20 (1/8)	8.80	6.40	1.60	3.20	1.70	2.00	3.30	5338	4226	73STSTL42
73 STSTL 4-3	3.20 (1/8)	8.80	8.00	3.20	4.80	1.70	2.00	3.30	5338	4226	73STSTL43
73 STSTL 4-4	3.20 (1/8)	8.80	10.00	4.80	6.40	1.70	2.00	3.30	5338	4226	73STSTL44
73 STSTL 4-6	3.20 (1/8)	8.80	12.70	8.00	9.60	1.70	2.00	3.30	5338	4226	73STSTL46
73 STSTL 4-8	3.20 (1/8)	8.80	16.00	9.60	12.70	1.70	2.00	3.30	5338	4226	73STSTL48
73 STSTL 5-2	4.00 (5/32)	11.00	8.00	0.80	3.20	2.10	2.50	4.10	5338	4226	73STSTL52
73 STSTL 5-3	4.00 (5/32)	11.00	10.00	3.20	4.80	2.10	2.50	4.10	5338	4226	73STSTL53
73 STSTL 5-4	4.00 (5/32)	11.00	11.40	4.80	6.40	2.10	2.50	4.10	5338	4226	73STSTL54
73 STSTL 5-6	4.00 (5/32)	11.00	14.50	8.00	9.60	2.10	2.50	4.10	5338	4226	73STSTL56
73 STSTL 5-8	4.00 (5/32)	11.00	16.50	9.60	12.70	2.10	2.50	4.10	5338	4226	73STSTL58
73 STSTL 6-2	4.80 (3/16)	13.00	8.00	0.80	3.20	2.50	2.90	4.90	5338	4226	73STSTL62
73 STSTL 6-3	4.80 (3/16)	13.00	10.00	3.20	4.80	2.50	2.90	4.90	5338	4226	73STSTL63
73 STSTL 6-4	4.80 (3/16)	13.00	11.40	4.80	6.40	2.50	2.90	4.90	5338	4226	73STSTL64
73 STSTL 6-6	4.80 (3/16)	13.00	14.50	8.00	9.60	2.50	2.90	4.90	5338	4226	73STSTL66
73 STSTL 6-8	4.80 (3/16)	13.00	17.50	9.60	12.70	2.50	2.90	4.90	5338	4226	73STSTL68

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	Tensile	Shear	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		Nom	Nom	
73 STSTL 6-10	4.80 (3/16)	13.00	20.60	12.70	16.00	2.50	2.90	4.90	5338	4226	73STSTL610
73 STSTL 6-12	4.80 (3/16)	13.00	24.10	15.90	19.10	2.50	2.90	4.90	5338	4226	73STSTL612

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026