

*Disclaimer: Images are for illustrative purposes.*

## Large Flange Head Nutsert

**Body Type:** Round Open

**Outside Body:** Splined | Knurled


**Thread Type:** Metric - Coarse

**Body Material:** Stainless Steel

**Finish:** Stainless Steel A4-70 G316

**Corrosion Protection Level:** Ultimate

**Comments:** Before installing check that your Tool capabilities cover required size and material. We recommend using a paste on the mandrel thread to prolong mandrel life

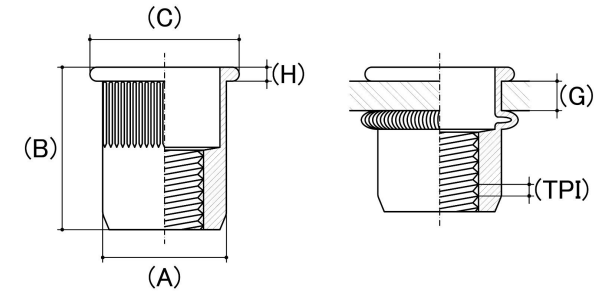

Size	Thread Pitch (mm)	Thread Type	Material Grip Range (G) (mm)		Overall Nut Height (B) (mm)	Head Diameter (C) (mm)	Nut Width (A) (mm)	Flange Thickness (H) (mm)	Recommended Hole Size (mm)	Pull Out (KN)	Push Out (KN)	Torque To Turn (NM)	sku (Part Number)
			Min	Max	Nom	Nom	Nom	Nom					
M4	0.70mm	Coarse	0.50	2.00	11.00	9.00	5.95	1.00	6.00	9	4	4	43LFS411KM
M4	0.70mm	Coarse	2.00	4.00	14.00	9.00	5.95	1.00	6.00	9	4	4	43LFS414KM
M5	0.80mm	Coarse	0.50	2.50	13.00	10.00	6.95	1.00	7.00	15	6	8	43LFS513KM
M5	0.80mm	Coarse	2.50	4.50	16.00	10.00	6.95	1.00	7.00	15	6	8	43LFS516KM
M6	1.00mm	Coarse	0.50	3.00	16.00	12.00	8.95	1.50	9.00	20	9	15	43LFS616KM
M6	1.00mm	Coarse	3.00	5.00	18.50	12.00	8.95	1.50	9.00	20	9	15	43LFS6185KM
M8	1.25mm	Coarse	0.50	3.50	17.50	15.00	10.95	1.50	11.00	31	12	29	43LFS8175KM
M8	1.25mm	Coarse	3.50	6.00	20.00	15.00	10.95	1.50	11.00	31	12	29	43LFS820KM
M10	1.50mm	Coarse	1.00	3.50	19.00	17.00	12.95	2.00	13.00	42	15	39	43LFS1019KM
M10	1.50mm	Coarse	3.50	5.50	24.00	17.00	12.95	2.00	13.00	42	15	39	43LFS1024KM

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.