

*Disclaimer: Images are for illustrative purposes.*

## Plasterboard Timber Screw

**Head Style:** Bugle Head

**Drive Type:** Phillips

**Screw Point:** Needle Point


**Material:** Carbon Steel SAE 1022

**Class Grade:** Class 2

**Finish:** Zinc Yellow

**Corrosion Protection Level:** Moderate

**Internal External:** Internal

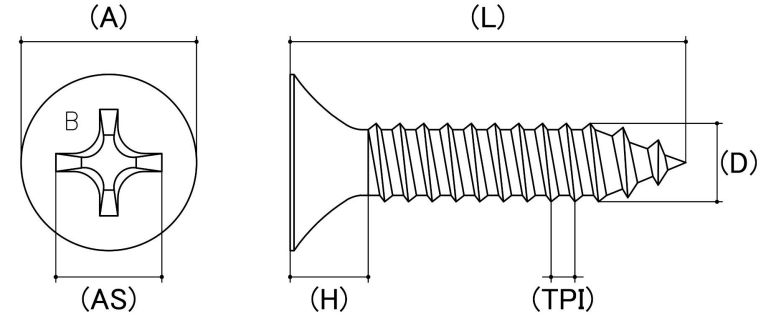

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Min To Max Steel Thickness (mm)		Single Shear (kN) Nom	Axial Tensile (kN) Nom	Torsional (Nm) Nom	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Min	Max	Min	Max					
6g (3.50mm)	18 TPI	Fine	3.40	3.50	8.20	8.40	3.00	3.20	0.42	1.00	3.300	5.500	3.600	PH2	07BU61820
6g (3.50mm)	9 TPI	Coarse	3.40	3.50	8.20	8.40	3.00	3.20	0.42	1.00	3.000	5.100	3.400	PH2	07BU6920
7g (3.90mm)	16 TPI	Fine	3.80	3.90	8.20	8.40	3.00	3.20	0.42	1.00	3.400	5.800	4.500	PH2	07BU71620
7g (3.90mm)	9 TPI	Coarse	3.80	3.90	8.20	8.40	3.00	3.20	0.42	1.00	3.200	5.500	4.200	PH2	07BU7920
8g (4.20mm)	15 TPI	Fine	4.00	4.20	8.40	8.60	3.00	3.20	0.42	1.00	4.100	8.700	5.900	PH2	07BU81550
8g (4.20mm)	9 TPI	Coarse	4.00	4.20	8.40	8.60	3.00	3.20	0.42	1.00	4.600	7.900	5.800	PH2	07BU8950
10g (4.80mm)	15 TPI	Fine	4.65	4.80	8.60	8.80	3.20	3.40	0.42	1.00	10.100	11.800	7.900	PH2	07BU1015100
10g (4.80mm)	8 TPI	Coarse	4.65	4.80	8.60	8.80	3.20	3.40	0.42	1.00	5.400	9.300	7.200	PH2	07BU10850

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.