

Disclaimer: Images are for illustrative purposes.

Tapcon

Head Style: Countersunk Head

Pre Drilling: Masonry = Yes, Timber = No


Material: Carbon Steel

Class Grade: Low Tensile Class 5.8

Material Finish: R1000 Silver Coating

Corrosion Protection Level: Excellent

Internal External: External

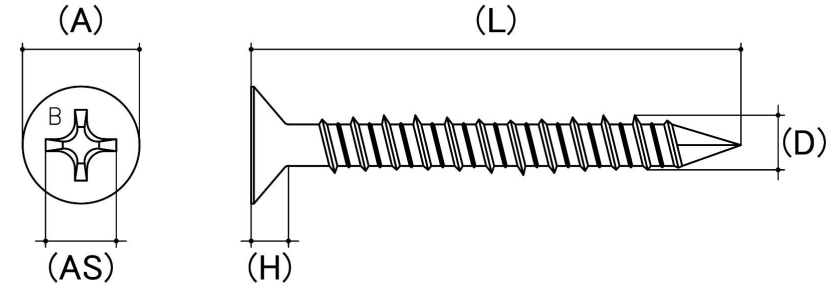

Size	Length (L) (mm)	Head Diameter (A) (mm)		Head Height (H) (mm)		Pilot Drill Size (mm)	Drill Hole Size (mm)	Drive Size (AS)	sku (Part Number)
		Min	Max	Min	Max				
M5	32	9.10	9.50	3.80	4.20	5	4	PH2	65TCC532R
M5	45	9.10	9.50	3.80	4.20	5	4	PH2	65TCC545R
M5	58	9.10	9.50	3.80	4.20	5	4	PH2	65TCC558R
M5	70	9.10	9.50	3.80	4.20	5	4	PH2	65TCC570R
M6.5	45	12.10	12.50	5.00	5.40	6	5	PH2	65TCC6545R
M6.5	58	12.10	12.50	5.00	5.40	6	5	PH2	65TCC6558R
M6.5	70	12.10	12.50	5.00	5.40	6	5	PH2	65TCC6570R
M6.5	83	12.10	12.50	5.00	5.40	6	5	PH2	65TCC6583R
M6.5	100	12.10	12.50	5.00	5.40	6	5	PH2	65TCC65100R

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 17 Mar 2026